

# SKW-V2/SKW-H2

## Metal Shell & Waterproof

### Ideal for outdoor installation



The SKW-V2 or SKW-H2 is a Standalone Keypad single-door controller with metal shell, It's rugged IP65 rated Waterproof structure offers extra durability and which makes it perfect for outdoor installations.

The value-added Auxiliary Input interface allows SKW-V2/SKW-H2 to link with an external source, for instance a smoke or gas detector etc., or an emergency switch. Once the linkage is triggered, the device would automatically generate an alarm signal and open the door in emergency cases of emergency situations.

The device has built-in wiegand out which makes it flexible either to connect with ZKTeco SRB mini controller for higher security, or connect with ZKTeco or any 3rd party controllers when switching to Reader Mode.

---

## Features





- Reads password and/or 125 KHz EM card; Optional to read 13.56MHz Mifare card
- Built-in auxiliary input with enhanced flexibility to link with wired detector or emergency switch
- Supports SRB mini controller by wiegand out
- Supports switch to Reader Mode and configurable wiegand 26 bit or 34 bit
- Anti-vandal, waterproof & back-lit keypad with metal key buttons
- Audible beep and visible indicator provide feedback for the user
- Access control interfaces for electric lock, door sensor, alarm, exit button and doorbell
- Lock control delay, Unlock duration, Alarm delay are programmable from 0 to 254 second
- Optical tamper switch and multiple alarm outputs
- Robust, flexible and generous elegant design

# Specifications

LED Indicator	Blue, Red
Keypad	Blue backlit, Numeric keys 0~9, Function keys *, #, Bell
Verification Type	Card, PW, Card/PW, Card+PW
Built-in Card Reader	125 kHz EM card (Optional 13.56 MHz Mifare card)
Card Capacity	1,000
Password Capacity	8 Password Groups
Log Capacity	N/A
Communication	N/A
Access Control Interface	Electric lock, Door sensor, Alarm, Exit button and Doorbell
Wiegand Interface	Wiegand out
Auxiliary Interface	1 ea Auxiliary Input for linkage function
Power In	12V DC
Operating Temperature	-20 °C-50 °C
Operating Humidity	≤95%
Specification(W×H×D)	SKW-V2: 50.2×160.2×21mm/SKW-H2: 86.2×120.2×21mm
Ingress Protection Rate	IP65

## Configuration

## Dimensions (mm)

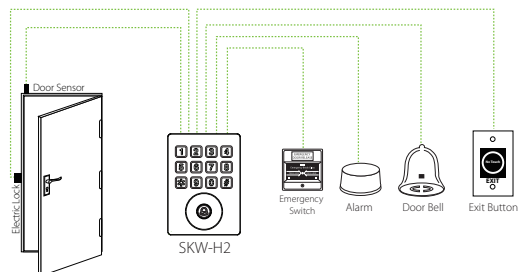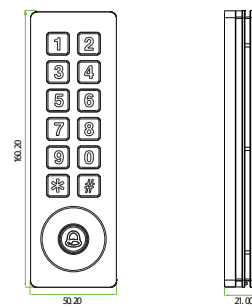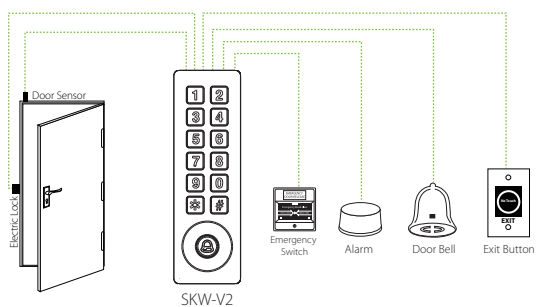

### ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town,  
Longgang District, Shenzhen China 518129  
Tel: 86-755-8960 2345/46/47/48  
E-mail: sales@zkteco.com  
www.zkteco.com

### Global Offices:

USA: +1 732-412-6007  
EU: +34 916532891  
Brazil: +55 31 2515-8326  
Thailand: +66-027199154  
Mexico: +52-55-52928418

South Africa: +27 12 259 1047  
Egypt: +201110444134  
Dubai: +971 4 6091 310  
India: +91 8123536788  
Indonesia: +62 21 2921 8949

Vietnam: +84-0169-5813007  
Philippines: +63 9084118832  
Russia: +8 915 178-46-81